



Texan Stone LLC DBA Texan Minerals and Chemicals

12814 Murphy Road, Stafford, TX 77477
Phone: 713-294-4180 Email: Mani@TexanStone.com



TEXAN DRY FRESH SUSPENSION TS-FS

TS-FS is a premium fine powder based Anionic Polyacrylamide friction reducer (FR) suspension that is highly effective in fresh water and light-brine conditions. It has a high molecular weight and is manufactured as a liquid- suspension form in robust loadings ranging from (1.5 lb.- 4lb.)/gallon. Typically 2.5 lb./gallon is used for most applications. Addition of small amounts, typically 0.25 – 1.00 gpt (gallons per thousand gallons) in a typical a 2.5 lb. loading slurry can deliver friction reduction (pressure loss) of over 70% in a short period of time. Due to its rapid hydration properties, TS-FS can be pumped continuously into the stimulation fluids as supplied or by batch mixing before treatments. TS-FS is APE (alkyl phenol ethoxylates) and NPE (nonyl phenol ethoxylates) free, thus making it environmentally friendly. It is a field tested and proven product in oil field operations.


APPLICATIONS

TS-FS has been specifically optimized for use as a fresh water-to-light brine friction reducer, which can be added as supplied due to its emulsion form and excellent hydration properties. It is compatible with common non-ionic and anionic stimulation additives such as surfactants, scale inhibitors, biocides, etc., and can be used with low to moderate salt concentrations. TS-FS can achieve optimal performance at low dosages reducing overall treatment costs.

TEST METHODS

Test Method(s): Friction reduction properties were tested on a custom Flow Loop in Midland tap water. Texan Dry Fresh Slurry 1.5 lb. loading was used. The test section of the loop consisted of pipe having 3/8" O.D. Typical dosage of 0.22 GPT or 0.33 PPTG powder equivalent was used. The Midland Tap water contained 53 mg/lit of Chloride, 90 ppm of Sulfate, 57 ppm of Bicarbonate and 125 ppm of Acetates.

TEXAN DRY FRESH 1.5 # SUSPENSION @ 0.22 GPT in Midland Tap Water

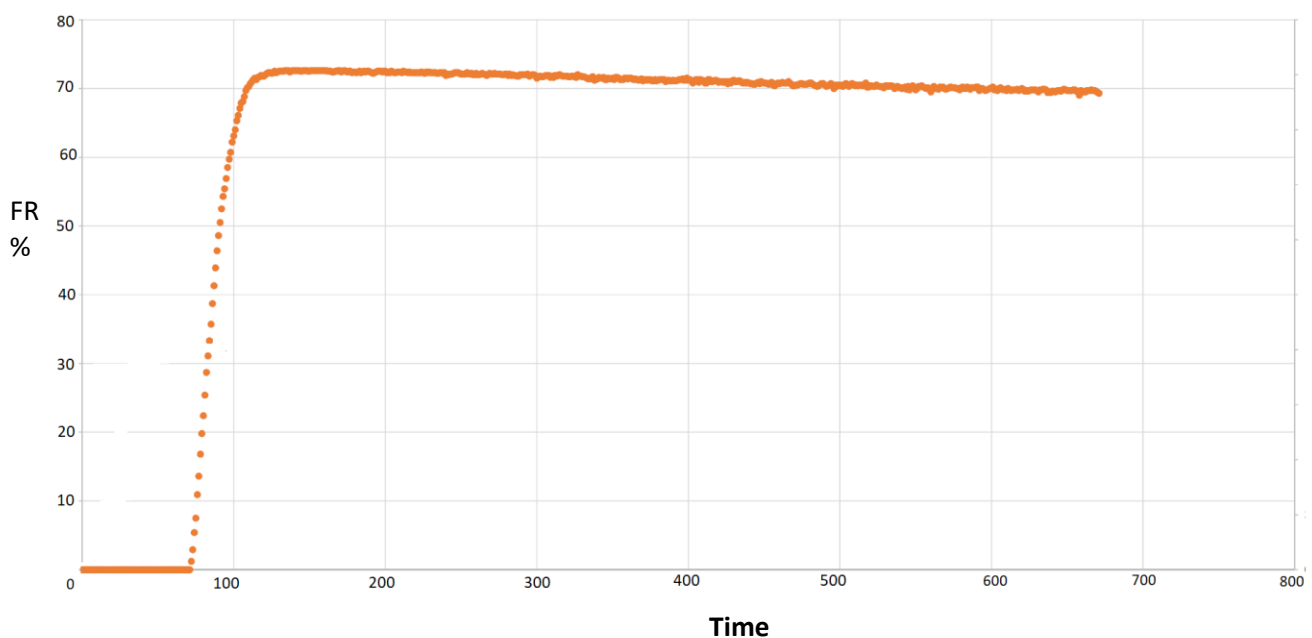



Texan Stone LLC
DBA Texan Minerals and Chemicals

12814 Murphy Road, Stafford, TX 77477
 Phone: 713-294-4180 Email: Mani@TexanStone.com



PROPERTIES

Form	Opaque Liquid
Flash Point	> 140 F (60.0 C). Method used: ASTM D Closed Cup
Freeze Point	-40 F (-40 C)
Viscosity (cps)@Temp	No data available
Color	White / Off-White
Odor	Slight petroleum oil
Density	8.8 lbs/gal
pH	5-8 (1% solution)
Solubility	Water Soluble
Shelf Life	30 Days <i>(It is recommended to store indoors between 5 – 30 C.)</i>

PACKAGING (customized packaging available upon request.)

Size	Packaging	Weight
55 gal.	Drum	475 lbs
275 gal.	Tote	2,300 lbs
330 gal.	Tote	2,800 lbs
5000 gal.	Bulk/ISO	45,500 lbs

Disclaimer: The information provided in this document is for general purpose only and is believed to be accurate to the best of our knowledge. Texan and its affiliates do not make any guarantee or warrantee regarding the accuracy of the data, merchant ability, fitness for a particular purpose or use, title, non-infringement, etc. The user agrees to assume all liabilities related to the use of or reliance on such information. Texan and its affiliates shall not be liable for any direct, indirect, special, punitive, exemplary or consequential damages from any cause whatsoever including but not limited to its negligence.